



Machine Specification






Type: **Laser Line Projector**


Model: **LASIC KML-5XXX Series**

Feature: More than 20,000 hours lifespan!

Application References



Setup Reference

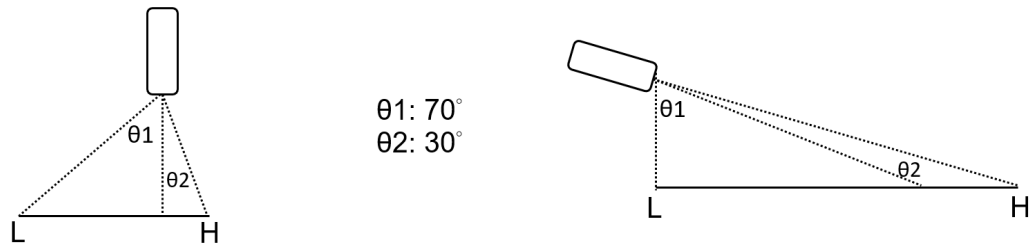

Specifications

| Model | KML-5403 | KML-5405 | KML-5305 | Full Range |
|------------------|-------------------------|----------|----------|--------------|
| Output Power | 3 mW | 5 mW | 5 mW | 3 ~ 5 mW |
| Wavelength | 630 ~ 650 nm (Red) | | | |
| Project Distance | < 1m | < 2m | < 3m | 1 ~ 3m |
| Line Length | 1m | 62m | 3m | 1 ~ 3m |
| | (Indoor 300 ~ 500 lux) | | | |
| Line Width | < 0.5 mm | < 1.0 mm | < 1.5 mm | 0.5 ~ 1.5 mm |
| | (Adjustable focus lens) | | | |
| Env. Temp. | -10 ~ 50 °C | | | |
| Safety Class | Class IIIa | | | |
| Lifetimes | > 20,000 hours | | | |
| Dimensions | 25 x 100 mm (D x L) | | | |
| Weight | 85 ±5 g | | | |

Requirements

| | | |
|-------|-------|--------|
| Power | DC 5V | DC 24V |
|-------|-------|--------|

